



ZYTRONIC DATA SHEET

ZXY300™

The ZXY300™ controller is designed to support very large form/format MPCT™ multi-touch sensors manufactured by Zytronic

ADVANTAGES

- 40 independant touch points
- Supports MPCT™ sensors sizes 55" - 85"
- Enables rapid touch detection
- Support for Win7, 8 & 10, as well as Linux 3.5.1+ Kernels (10 point touch) or 3.9.0+ (40 touch points)
- Detachable and completely independant of the touch sensor
- Output protocol available on request
- Range of operating systems supported

OPERATION

The touch sensor is divided into an X - Y matrix of sensing cells, using an array of embedded 10µm copper electrodes, which are near invisible to the human eye on a powered display. These electrodes are connected to a controller board and a charge is applied to the array.

When a finger or conductive stylus approaches the surface of the sensor a change in the charge is detected in the nodes immediately beneath adjacent cells; the position is then determined by the controller and its firmware . Unlike conventional capacitive systems the active component of MPCT™ can be embedded behind a thick front substrate, ensuring protection, long life and stability.


The unique sensing characteristics of MPCT™ sensing elimantes the need for an operating force, providing users with tsimilar levels of touch sensitivity as experienced with the latest smartphones and tablet PC's but on a much larger scale, and in any environment or location.

APPLICATIONS

Zytronic's Multi-Touch PCT™ products meet the latest requirements for multi touch and multi user interactivity, while still maintaining the high levels of durability that Zytronic's products are known for.

The controller has been designed to function seamlessly with the latest operating systems supporting multitouch and application software packages such as NUI TEQ's Snowflake, Omnivision's Omnitapps and Touch Tech's LIMA.

They are the perfect choice for multiuser signage, leisure and surface applications.

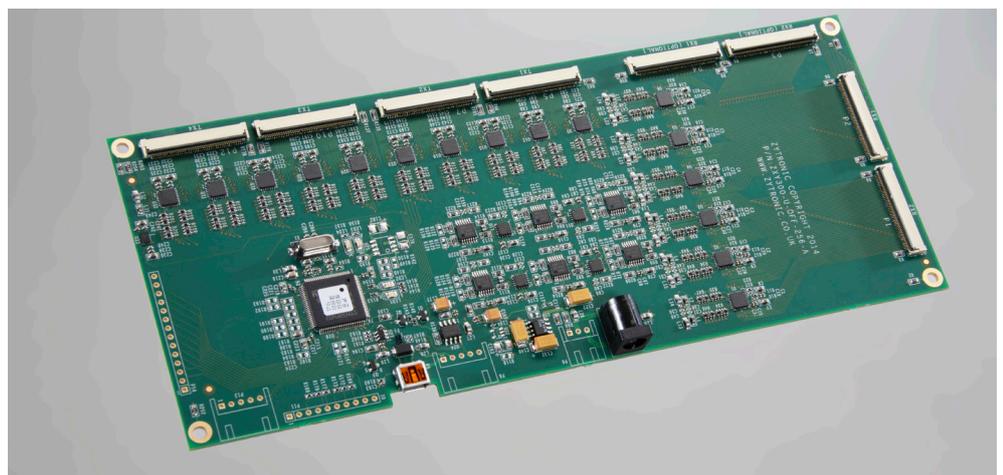

CONTROLLER

- Controller powered from external regulated 12v \pm 5% d.c. supply and USB UBUS (5v)
- 12v connection via a 2.1mm socket (central pin +12v)
- Current consumption <150mA
- Supports sensor sizes from 55-85"
- X - Y co-ordinate update rate \sim 1mS at controller, \sim 8mS to 12mS at host due to USB coms.
- Accuracy <1mm
- Maximum recommended glass thickness 8mm
- Controller recognised as HID device in Linux 3.5.1+ kernels (10 point touch) or 3.9.0+ (40 point touch)
- Configuration tool software (ZyConfig™) is available to download from the Zytronic website to enable controller sensitivity settings to be adjusted in Windows and Linux operating systems

APPROVALS


RoHS Compliant

CE, FCC (Class B) & UL approved

www.zytronic.co.uk/support/quality-assurance

DRAWINGS

USB only

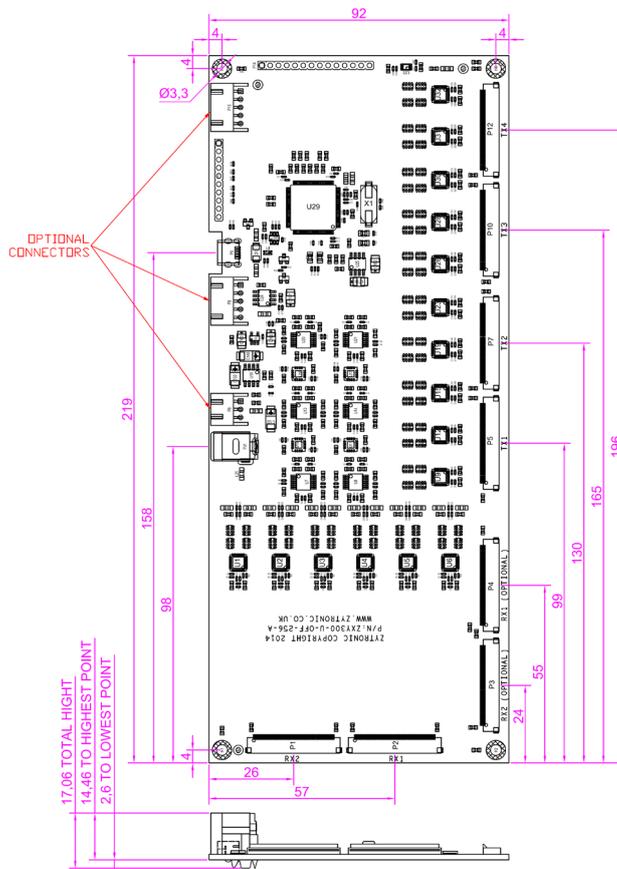

ZYTRONIC and its logo are registered in the United Kingdom and other countries.



Company No: 379908. Registered in England. VAT No: GB 746 4858 88

Whiteley Road
Blaydon on Tyne
Tyne & Wear
NE21 5NJ
United Kingdom

T: +44 (0) 191 414 5511
F: +44 (0) 191 414 0545
E: info@zytronic.co.uk

www.zytronic.co.uk